

Restricting Flow Orifice Plates

Critical flow orifice plates provide low cost protection against meter overspeed. Plates are installed 2 to 4 pipe diameters downstream for maximum effectiveness.



Companion Flange Assemblies

These kits include all the equipment necessary for mounting a meter in a pipeline. The kit consists of flanges, coated flange bolts, and gaskets.




Flange Gaskets

LineBacker™ gaskets, with their unique sealing element, use the lowest possible clamp and compressive load to eliminate flange leaks.



Coated Flange Bolts

These bolts have a lubricious, polymer-based coating to help prevent galling of the threads in the meter body.

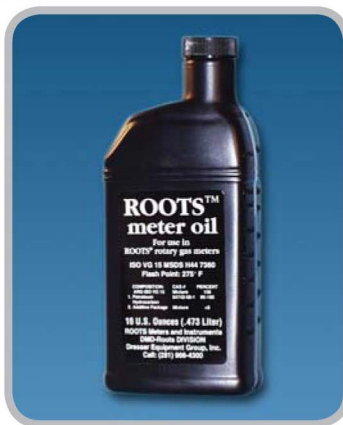

Meter Oil

Approved for use in all Dresser meters. The oil is packaged in quantities from 4 ounces to 55 gallons.



Differential Test Plugs

Allows user to take pressure and temperature readings quickly while eliminating the cost of leaving gauges or temperature indicators in line.